

A

04/25/00

PTD  
04/25/00  
09/557158**UTILITY  
PATENT APPLICATION  
TRANSMITTAL**

Only for new nonprovisional applications under 37 CFR 1.53(b)

Attorney Docket No.

2264-0321-0X

First Inventor or Application Identifier

Domenico SANFILIPPO, et al.

Title

PROCESS FOR THE PRODUCTION OF SYNTHESIS GAS

**APPLICATION ELEMENTS**

See MPEP chapter 600 concerning utility patent application contents

ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ Fee Transmittal Form (e.g. PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☒ Specification Total Pages **21**
3. ☒ Drawing(s) (35 U.S.C. 113) Total Sheets **1**
4. ☐ Oath or Declaration Total Pages
- a. ☐ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. §1.63(d))  
(for continuation/divisional with box 15 completed)
- i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named  
in the prior application, see 37 C.F.R. §1.63(d)(2) and  
1.33(b).
5. ☐ Incorporation By Reference (usable if box 4B is checked)  
The entire disclosure of the prior application, from which a copy of the  
oath or declaration is supplied under Box 4B, is considered to be part  
of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.

**ACCOMPANYING APPLICATION PARTS**

6. ☐ Assignment Papers (cover sheet & document(s))
7. ☐ 37 C.F.R. §3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
8. ☐ English Translation Document (if applicable)
9. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
10. ☐ Preliminary Amendment
11. ☒ White Advance Serial No. Postcard
12. ☐ Small Entity Statement(s) ☐ Statement filed in prior application. Status still proper and desired.
13. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
14. ☒ Other: Notice of Priority, List of Inventors' Names and Addresses

**15. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below:**


☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application no.:  
Prior application information: Examiner: Group Art Unit:

**16. Amend the specification by inserting before the first line the sentence:**

- ☐ This application is a ☐ Continuation ☐ Division ☐ Continuation-in-part (CIP)  
of application Serial No. Filed on
- ☐ This application claims priority of provisional application Serial No. Filed

**17. CORRESPONDENCE ADDRESS**

OBLON, SPIVAK, MCCLELLAND, MAIER & NEUSTADT, P.C.  
FOURTH FLOOR  
1755 JEFFERSON DAVIS HIGHWAY  
ARLINGTON, VIRGINIA 22202  
(703) 413-3000  
FACSIMILE: (703) 413-2220

Name:	Norman F. Oblon	Registration No.:	24,618
Signature:		Date:	4/25/00
Name:	C. Irvin McClelland	Registration No.:	

Registration Number 21,124

## PROCESS FOR THE PRODUCTION OF SYNTHESIS GAS

The present invention relates to a process for the production of synthesis gas.

10 More specifically, the present invention relates to a process for the production of synthesis gas by means of the autothermal reforming of light hydrocarbons.

Even more specifically, the present invention relates to a process for the production of synthesis gas by means  
15 of the autothermal reforming of natural gas and/or methane.


Processes for the production of synthesis gas from light hydrocarbons have been known for a long time. According to the steam reforming technique, methane, or another light hydrocarbon, is reacted with water vapor at a high  
20 temperature according to the reaction scheme:




The reaction is considerably endothermic, requires in fact about 50 Kcal per mole of converted methane and is therefore not very convenient from an industrial point of  
25 view due to the high operating costs associated with the

energy consumption.

In order to overcome these limits, an alternative technology has been proposed, known as "partial oxidation" as the heat necessary for the production of synthesis gas  
5 derives from the partial oxidation of methane, according to the reaction scheme:



With partial oxidation, moreover, significant quantities of carbon dioxide and water vapor are always formed as  
10 the methane is always partially transformed also into these products (total oxidation). The equilibrium of the "shift" reaction therefore tends to be established:



The high exothermicity of the partial oxidation reaction hinders industrial application as temperatures much  
15 higher than 1000°C are reached under adiabatic conditions, considerably increasing the investment costs relating to the materials and construction technologies.

The application of the autothermal reforming reaction  
20 has become widely used in the last few years, and is carried out by contemporaneously feeding pure oxygen, as primary oxygen source, and methane, or another light hydrocarbon, with water vapor to the synthesis reactor so that reactions (I) and (II) take place contemporaneously and the  
25 endothermicity of the one compensates the exothermicity of

the other, ensuring that there is no distinct production or consumption of heat. Also in this case, however, the process is not very convenient as the use of pure oxygen as primary oxygen source requires the running of a cryogenic unit for the separation of air, whose investment and operating cost greatly jeopardizes the oxidative reforming process. In fact, in a process for the production of synthesis gas by means of autothermal reforming, more than 50% of the production cost is linked to the production of oxygen. On the other hand, it is also not very convenient to use air as such or enriched, as the nitrogen present in the air itself would dilute the synthesis gas to a degree which is not acceptable for most applications.

To overcome this latter problem, the use of metal oxides capable of being reduced by methane or another hydrocarbon, has been proposed, as primary oxygen source. In "Industrial and Engineering Chemistry", vol. 41, Nr. 6, 1227-1237 (1949) a catalytic partial oxidation process of methane is described wherein the oxygen source consists of copper oxide which proves to be a very active oxidizing agent and which can be easily re-oxidized by means of air. The patent U.S. 5,799,482, in particular, describes a process for the production of synthesis gas in which the partial oxidation of a light hydrocarbon is effected in continuous, to produce synthesis gas, using as primary oxygen

source, a metal oxide capable of undergoing continuous re-  
duction/oxidation (redox) cycles. Oxides cited as being  
particularly suitable for undergoing redox reaction cycles  
are oxides of copper, chromium, cobalt, iron, manganese,  
5 their mixtures or, alternatively, binary or ternary metal  
oxides.

The embodiment in continuous of the process described  
in the patent U.S. 5,799,482 comprises the use of two fluid  
bed reactors. The first reactor (autothermal reactor), op-  
10 erating at a preferred temperature of 1600-1850°F and at a  
pressure of 150-450 psig. contains the metal oxide, and an  
optional catalyst which activates the partial oxidation re-  
action according to schemes (II) and (III), and is fed in  
continuous with the light hydrocarbon to be oxidized. The  
15 second reactor (combustor/regenerator), operating at a tem-  
perature higher than that of the first, contains the re-  
duced metal oxide and is fed in continuous with a fuel mix-  
ture (air/methane) to burn the carbonaceous residues pres-  
ent on the solid and re-oxidize the metal.

20 The two reactors are connected to each other and con-  
tinuously exchange the exhausted oxide and regenerated ox-  
ide. According to this process, moreover, the exhausted  
gases leaving the regenerator are mixed with fresh air at a  
high pressure and used in a gas turbine to produce energy.

25 The process of patent U.S. 5,799,482 also has its


drawbacks. In fact, the reduction of the metal oxide is endothermic and, even in the case of pure catalytic partial oxidation, in order to keep the reaction temperature constant in the first reactor, heat is supplied by recycling  
5 the regenerated oxide at a temperature higher than the oxidation temperature, thus increasing the investment and operating costs. In addition, the oxidative action of the oxide must be integrated with supplementary oxidizing gas, for example pure oxygen, air as such or enriched air, thus  
10 conserving, although in reduced form, the disadvantages of the previous technologies.

An objective of the present invention is to provide a process for the production of synthesis gas by means of catalytic partial oxidation or autothermal reforming in  
15 which the primary oxygen source is represented by a metal oxide capable of undergoing redox cycles which does not have the drawbacks described above.

More specifically, the objective of the present invention is to provide a process for the production of synthesis gas which is actually autothermal and which consequently does not require any heat supplement, supplied externally for example, by means of the regenerated and recycled metal oxide, and in which the primary oxygen source is  
20 exclusively represented by a metal oxide capable of undergoing redox cycles, without any additional oxidative  
25

sources.

The Applicant has succeeded in obtaining the desired objectives as it has been found that there are metal oxides capable of autonomously sustaining the catalytic partial  
5 oxidation reaction by means of the above redox cycles. In particular, it has been surprisingly found that hexavalent chromium oxide has the required requisites. The redox reaction of chromium between oxidation states III and VI can be described as follows:



As the transfer of oxygen on the part of hexavalent chromium oxide is slightly endothermic (9.5 Kcal/mol) whereas the reaction for producing synthesis gas from light hydrocarbons, for example methane, by means of partial oxidation, is exothermic (from a minimum theoretical value of  
15 8.5 Kcal/mol to 20-30 Kcal/mole in relation to the various operating conditions), the overall reaction which takes place in the synthesis reactor, when the oxygen for the partial oxidation of methane is supplied according to reaction (IV), remains exothermic, contrary to when the oxygen  
20 is supplied by the reduction of other oxides indicated in literature such as, for example, trivalent chromium.

This factor leads to two fundamental advantages in the industrial exploitation of this reactive system:

25 - the circulation of solid from the regenerator to the

reactor does not have to supply heat but only the oxygen necessary for the reaction. The transporting of the solid can therefore be optimized on this single parameter;

- 5 - the regenerator can operate at a temperature which is lower than or equal to that of the reactor with a great saving in investment costs and a reduction in mechanical and construction problems.

The use of hexavalent chromium as primary oxygen  
10 source in the autothermal reforming of light hydrocarbons is extremely surprising, as it is impossible (Mellor, "Inorganic and Theoretical Chemistry" Chromium, 211-225) to oxidize trivalent chromium to hexavalent chromium operating under the conditions existing inside the regenerator. In  
15 theory, consequently, it could not be used in partial oxidation processes where the primary oxygen source comes from a metal oxide. It has been observed however, that by fixing chromium on suitable carriers, as illustrated below, it is possible to activate the catalytic partial oxidation proc-  
20 ess of a light hydrocarbon by exploiting the reversible redox reaction of chromium between oxidation states III and VI.

An object of the present invention therefore relates to a process for the production of synthesis gas, by means  
25 of the catalytic partial oxidation or autothermal reforming




of light hydrocarbons, which comprises partially oxidizing the hydrocarbon with oxygen coming from the reduction of at least one metal oxide selected from hexavalent chromium oxide, supported on an inert carrier and modified with an alkaline and/or earth-alkaline metal, and metal oxides capable of autonomously sustaining the catalytic partial oxidation reaction by means of redox cycles such as silver oxide, nickel oxide and lead oxide.

According to the present invention, the oxides mentioned above can also be used in a mixture with other metal oxides capable of undergoing redox cycles, such as for example, oxides of copper, manganese, vanadium, cerium, titanium, iron, cobalt, praseodymium, bismuth, zinc, cobalt, antimonium and molybdenum in such quantities as to maintain the formation reaction of synthesis gas globally exothermic. These quantities of oxides generally range from 0 to 50% by weight, calculated with respect to the total.

A particularly preferred metal oxide for the process for the production of synthesis gas object of the present invention is hexavalent chromium oxide. A further object of the present invention therefore relates to a process for the production of synthesis gas by means of the catalytic partial oxidation reaction or autothermal reforming of light hydrocarbons, which comprises:

i) partially oxidizing the hydrocarbon with oxygen coming

from the reduction reaction of an oxidizing system, comprising hexavalent chromium oxide, according to the scheme:



- 5 wherein the chromium oxides of reaction (IV) are supported on an inert inorganic material modified with alkaline and/or earth-alkaline metals; and
- (ii) re-oxidizing the supported  $\text{Cr}_2\text{O}_3$  to  $\text{CrO}_3$  by means of air in a reactor maintained at a temperature which is
- 10 substantially equal to or lower than that present in the reactor of step (i).

According to the present invention, therefore, the oxidizing system comprises chromium VI oxide alone or, alternatively, chromium VI oxide mixed with other metal oxides capable of undergoing redox cycles, such as for example, the

15 oxides previously mentioned, in such proportions as to maintain the formation reaction of synthesis gas globally exothermic. Also in this case, this proportion of oxides generally ranges from 0 to 50% by weight, calculated with

20 respect to the total.

The chromium III oxide, promoted with an alkaline and/or earth-alkaline oxide, for example with potassium oxide, is supported on a microspheroidal alumina (average particle diameter ranging from 40 to 100 micron) modified

25 by the addition of silica (0.1-10%), preferably from 1 to

3%. The specific surface of the alumina ranges from 30 to 200 m<sup>2</sup>/g, whereas the quantity of chromium oxide varies from 1 to 30% by weight and that of the potassium oxide from 1 to 10% by weight with respect to the total. The catalyst is prepared by "incipient wetness" of the alumina with an aqueous solution containing the suitable quantity of potassium dichromate dissolved, to formulate the catalyst with the established charge of chromium III oxide. If a molar ratio Cr/K different from 1 is to be obtained, the impregnation can be effected with a precursor for the chromium different from dichromate, and this also applies to the potassium. After the impregnation, the impregnate is dried within a temperature range of 100 to 120°C for 4 hours, and the dried product is finally calcined within a temperature range of 800 to 900°C for 4 hours.

Even more specifically, an object of the present invention relates to a continuous process for the production of synthesis gas by the autothermal reforming of light hydrocarbons which comprises:

- a) feeding the hydrocarbon stream in gas phase to a first fluid bed partial oxidation reactor, containing a solid of the type described above, comprising CrO<sub>3</sub>, in its partially oxidized state;
- b) discharging a gas stream essentially consisting of H<sub>2</sub>, CO and, optionally, the non-reacted hydrocarbon phase,

from the head of the first reactor;

- c) collecting at the bottom of the first reactor a solid containing chromium III oxide and feeding this to a second fluid bed regeneration reactor maintained at a temperature substantially equal to or lower than that present in the oxidation reactor;
- d) feeding to the bottom of the second regeneration reactor a stream of air at high temperature;
- e) recycling the regenerated solid to the first oxidation reactor.

Any light hydrocarbon can be used in the process object of the present invention. Light paraffins are generally used, such as methane or ethane, or, alternatively, liquefied petroleum gas (LPG), refinery gas, naphthas, such as "virgin naphtha" or "cracked naphtha", etc. The preferred hydrocarbon stream however is methane.

A temperature ranging from 800 to 1100°C, preferably from 900 to 1000°C and a pressure ranging from 0.5 to 5 MPa, preferably from 1 to 3 MPa, is maintained in the first fluid bed oxidation reactor. Due to the effectiveness of the partial oxidation reaction, this temperature is reached and kept constant by the exothermicity of the reaction itself, without requiring supplementary external supplies of heat or additional oxidizing sources. The hydrocarbon stream is fed to the first reactor after being preheated to

a temperature ranging from 400 to 600°C.

The synthesis gas thus obtained, after being discharged from the first reactor, is cooled, with the recovery of heat, and treated to eliminate the reaction by-products, for example water and carbon dioxide, and recover the non-reacted hydrocarbon phase. After filtration to eliminate the powders of entrained solid material, it can then be sent to subsequent syntheses, for example for the production of methanol or paraffinic waxes according to the Fischer-Tropsch technology. For this purpose the partial oxidation reaction is carried out with feedings and/or operating conditions which are such as to produce a synthesis gas with a molar ratio  $H_2/CO$  suitable for the above syntheses. The molar ratio  $H_2/CO$  generally ranges from 1 to 4.

In the partial oxidation reaction of the light hydrocarbon according to the present invention, the oxygen is supplied by the oxidizing system, for example by the oxidizing system comprising hexavalent chromium oxide which is gradually reduced according to reaction scheme (IV) to trivalent chromium. To obtain a gradual passage between these two oxidation states, the solid containing chromium VI oxide is charged into the upper part of the oxidation reactor and maintained in fluid state, by the hydrocarbon stream, so as to slowly descend towards the bottom in countercurrent with the gas phase which is rising. During this de-

scent, the chromium VI oxide is gradually reduced to chromium III oxide, releasing the oxygen necessary for the partial oxidation reaction.

The exhausted solid is therefore collected on the bottom of the first reactor and is continuously removed and fed to the second fluid bed regeneration reactor. The same operating conditions present in the first reactor are substantially maintained inside this second reactor. The regeneration reactor operates with temperatures equal to or lower than those present in the partial oxidation reactor, for example with temperatures ranging from 750 to 1050°C, preferably from 850 to 950°C.

The fluid bed regeneration reactor substantially operates in the same way as the first. The exhausted solid is charged to the upper part of the reactor and maintained in fluid state by preheated air, so as to slowly descend towards the bottom in countercurrent with the gas phase which is rising. During this descent, the exhausted oxidizing system, for example chromium III oxide, is gradually oxidized to chromium VI oxide.

The regenerated solid is therefore collected on the bottom of the second reactor and is continuously recycled to the first reactor. The exhausted hot air, essentially consisting of nitrogen, is cooled, filtered and discharged to a chimney.

The enclosed figure provides a scheme which is purely illustrative of the continuous process for the production of synthesis gas object of the present invention and in which the oxidizing system consists of chromium VI oxide.

5 With reference to the drawing, (2) and (7) respectively represent the oxidation and regeneration reactors whereas (4) and (10) are the conveying lines which send the exhausted solid to the regeneration reactor and the re-oxidized solid to the oxidation reactor, respectively.

10 The light hydrocarbon (1), for example methane, is fed to the base of the reactor (2) by means of a suitable distributor, not shown in the figure and, as it flows upward, it maintains the solid in fluid state, undergoing partial oxidation. The synthesis gas thus obtained is discharged at  
15 the head by means of (3).

The chromium oxide  $\text{Cr}_2\text{O}_3$ , supported on an inert inorganic material, for example, alumina, is collected on the bottom of the reactor (2) and is pneumatically sent by means of transfer line (4) and with the introduction of  
20 conveying gas, for example air or nitrogen, (5) and (6), to the upper part of the regeneration reactor (7).

The air for the oxidation (8), optionally enriched with oxygen, is fed to the base of the reactor (7) by means of a suitable distributor, not illustrated in the figure,  
25 and, as it flows upward, it maintains the solid in fluid

state while oxidizing the chromium III to chromium VI. The exhausted air is discharged at the head by means of (9).

The chromium oxide  $\text{CrO}_3$ , again supported on alumina, is collected on the bottom of the reactor (7) and is pneumatically sent by means of transfer line (10) and with the introduction of carrier gas, for example methane, (11) and (12) to the upper part of the oxidation reactor (2).

An illustrative but non-limiting example is provided hereunder for a better understanding of the present invention.

#### EXAMPLE 1

Reference is made to the drawing of the enclosed figure wherein the oxidation reactor has an internal diameter of 3.5 cm and the regenerator an internal diameter of 5 cm. 3600 grams of solid material in the form of microspheroidal particles with an average particle diameter equal to 70 micrometers are charged into the two containers. The material consists of alumina containing 1.6% of silica and is impregnated with 20% by weight of  $\text{Cr}_2\text{O}_3$  and 3% by weight of potassium ions. The preparation procedure is identical to that described above.

Once the catalyst is fluidized in the two reaction containers, the following distribution of solid material is obtained: 2000 grams are present in the regenerator, 1400 grams are present in the reactor and the remaining 200



grams are equally subdivided between the two conveying lines.

The conveying of the catalyst between the two containers is regulated so as to have, in both directions, a flow-rate equal to 25 Kg/h of solid material.

The regenerator is maintained at a temperature of 700°C and at a pressure of 2 MPa. A flow-rate of 650 Nl/h of air preheated to 700°C is fed to the regenerator. The oxygen contained in the air reacts with the chromium III oxide, distributed on the surface of the particles, transforming it into chromium VI oxide. In this way 3.3 moles/h of  $\text{Cr}_2\text{O}_3$  contained in the solid material, corresponding to about 10% of the total chromium, are transformed into  $\text{CrO}_3$ .

The effluent gas from the regenerator has a flow-rate of 538 Nl/h and consists of 95.4% (molar) of nitrogen and the remaining 4.6% of oxygen.

The regenerated solid material is pneumatically conveyed to the top of the reactor with a flow-rate of 3.3 moles/h of  $\text{CrO}_3$ . The reactor is fed with a flow-rate of 172 Nl/h of methane and is maintained at a temperature of 900°C, owing to the exothermicity of the oxidation reaction, and a pressure of 20 atm.

The  $\text{CrO}_3$  is reduced, under the operating conditions of the reactor, releasing oxygen which reacts with the methane to form synthesis gas. In particular, the effluent stream

from the reactor has a flow-rate of 516 Nl/h and the following molar composition: 60.2% of  $H_2$ ; 30.6% of CO; 2.5% of  $CO_2$ ; and 6.5% of  $H_2O$  vapor.

#### EXAMPLE 2

5        The same procedure is substantially adopted as in example 1 but with a catalyst consisting of alumina containing 1.6% of silica, 3% of  $K^+$  and impregnated with a mixture of  $Cr_2O_3/CeO_2$  in a ratio of 20/1 ml. The reactor is maintained at a temperature of 900°C.

10       The effluent stream from the reactor, i.e. the synthesis gas produced, and the quantities of catalyst used are substantially equal to those of the previous example.

#### EXAMPLE 3

15       The same operating conditions are adopted as in example 1 but with a catalyst consisting of alumina containing 1.6% of silica, 3% of  $K^+$  and impregnated with a mixture of  $Cr_2O_3/Mn_2O_3$  in a ratio of 20/1 mol. The reactor is maintained at a temperature of 900°C.


20       The effluent stream from the reactor, i.e. the synthesis gas produced, and the quantities of catalyst used are substantially equal to those of the previous example.

## CLAIMS

1. A process for the production of synthesis gas, by means of the catalytic partial oxidation or autothermal re-forming of light hydrocarbons, which comprises partially  
5 oxidizing the hydrocarbon with oxygen coming from the re-duction of at least one metal oxide selected from hexava-lent chromium oxide, supported on an inert carrier and modified with an alkaline and/or earth-alkaline metal, and metal oxides capable of autonomously sustaining the cata-  
10 lytic partial oxidation reaction by means of redox cycles.
2. The process according to claim 1, wherein the metal oxides capable of autonomously sustaining the catalytic partial oxidation reaction by means of redox cycles are se-lected from silver oxide, nickel oxide and lead oxide.
- 15 3. The process according to claim 1 or 2, wherein the chromium VI oxide or the other oxides capable of autono-mously sustaining the catalytic partial oxidation reaction by means of redox cycles are used in a mixture with other metal oxides, capable of undergoing redox cycles, in such  
20 proportions as to maintain the formation reaction of syn-thesis gas globally exothermic.
4. The process according to claim 1, wherein the metal oxide is hexavalent chromium oxide.
5. A process for the production of synthesis gas, by  
25 means of the catalytic partial oxidation reaction or auto-

thermal reforming of light hydrocarbons, which comprises:

(i) partially oxidizing the hydrocarbon with oxygen coming from the reduction reaction of an oxidizing system, comprising hexavalent chromium oxide, according to the scheme:



wherein the chromium oxides of reaction (IV) are supported on an inert inorganic material modified with alkaline and/or earth-alkaline metals; and

(ii) re-oxidizing the supported  $\text{Cr}_2\text{O}_3$  to  $\text{CrO}_3$  by means of  
10 air in a reactor maintained at a temperature which is substantially equal to or lower than that present in the reactor of step (i).

6. The process according to claim 5, wherein the oxidizing system comprises chromium VI oxide mixed with other  
15 metal oxides, capable of undergoing redox cycles, in such proportions as to maintain the formation reaction of synthesis gas globally exothermic.

(7) The continuous process for the production of synthesis gas by the autothermal reforming of light hydrocarbons, according to claim 5 or 6, which comprises:  
20

(a) feeding the hydrocarbon stream in gas phase to a first fluid bed partial oxidation reactor, containing a solid, comprising  $\text{CrO}_3$ ;

(b) discharging a gas stream essentially consisting of  $\text{H}_2$ ,  
25 CO and, optionally, the non-reacted hydrocarbon phase, from

the head of the first reactor;

(c) collecting at the bottom of the first reactor a solid containing chromium III oxide and feeding this to a second fluid bed regeneration reactor maintained at a temperature  
5 substantially equal to or lower than that present in the oxidation reactor;

(d) feeding to the bottom of the second regeneration reactor a stream of air at high temperature;

(e) recycling the regenerated solid to the first oxidation  
10 reactor.


8. The process according to claim 7, wherein in the first fluid bed oxidation reactor a temperature ranging from 800 to 1100°C is maintained, together with a pressure ranging from 0.5 to 5 MPa.

15 9. The process according to claim 7 or 8, wherein in the second regeneration reactor the same operating conditions present in the first reactor are substantially maintained.

## PROCESS FOR THE PRODUCTION OF SYNTHESIS GAS

Abstract

Process for the production of synthesis gas, by means of  
10 catalytic partial oxidation or autothermal reforming of  
light hydrocarbons, which comprises partially oxidizing the  
hydrocarbon with oxygen coming from the reduction of at  
least one metal oxide selected from hexavalent chromium ox-  
ide, supported on an inert carrier and modified with an al-  
15 kaline and/or earth-alkaline metal, and metal oxides capa-  
ble of autonomously sustaining the catalytic partial oxida-  
tion reaction by means of redox cycles.

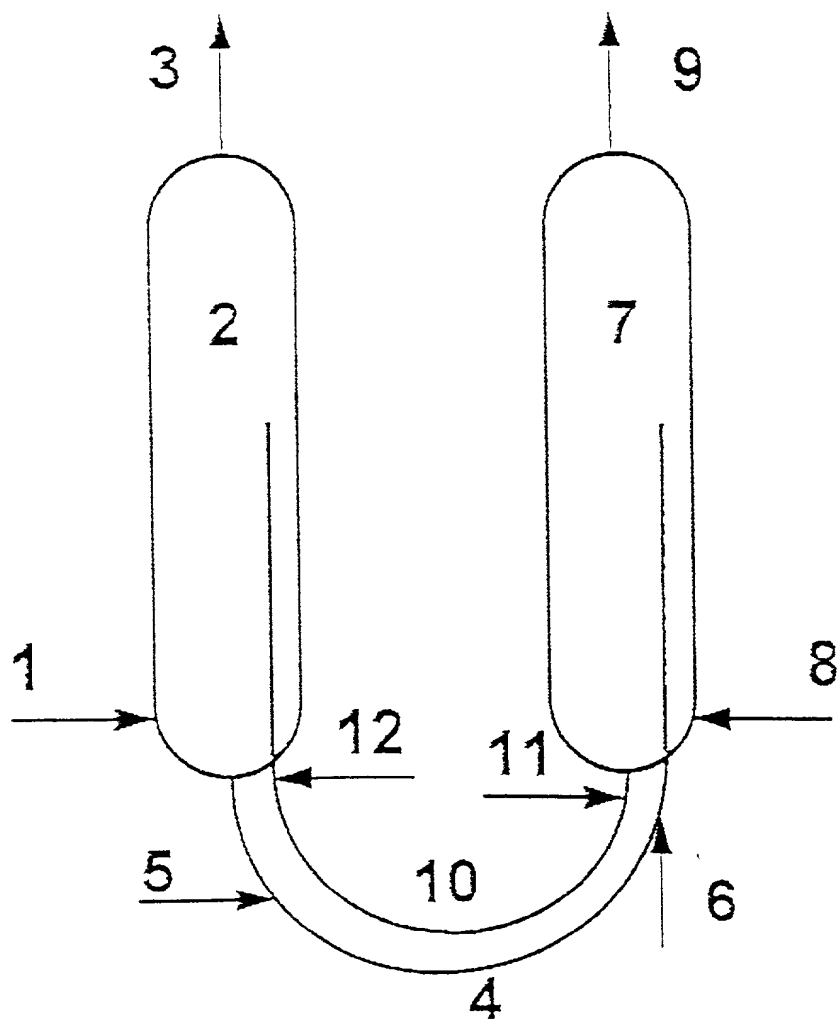

Docket No. 2264-0321-0X

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

IN RE APPLICATION OF: Domenico SANFILIPPO, et al.

FILING DATE: Herewith

FOR: PROCESS FOR THE PRODUCTION OF SYNTHESIS GAS

**LIST OF INVENTORS' NAMES AND ADDRESSES**

ASSISTANT COMMISSIONER FOR PATENTS  
WASHINGTON, D.C. 20231

SIR:

Listed below are the names and addresses of the inventors for the above-identified patent application.

Domenico SANFILIPPO	Paullo, Italy
Alberto PAGGINI	Spino D'Adda, Italy
Ivano MIRACCA	Lodi, Italy
Carlo RESCALLI	S. Donato Milanese, Italy

A declaration containing all the necessary information will be submitted at a later date.

Respectfully Submitted,

OBLON, SPIVAK, McCLELLAND,  
MAIER & NEUSTADT, P.C.



Norman F. Oblon

Registration No. 24,618

**C. Irvin McClelland**  
**Registration Number 21,124**

Fourth Floor  
1755 Jefferson Davis Highway  
Arlington, Virginia 22202  
Tel. (703) 413-3000  
Fax. (703) 413-2220  
(OSMMN 11/98)